

Excellence in Technical Representation
www.btureps.com



MHCFC4W- XX - XX

4-Pipe Heat/Cool

Nominal Tons
04 = 1 Ton
08 = 2 Ton
12 = 3 Ton
16 = 4 Ton

Voltage
01= 208/230-1-50/60



- Multi aqua Ceiling Cassettes are available in 2 Pipe or 4 Pipe but do not offer Electric Heat.
- This Unit allows for Outside Air



| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| C | A | W | X | 0 | 8 | * | * | A |
|---|---|---|---|---|---|---|---|---|

Type: [CA= Cassette Air Handler]

Heat Exchanger: [W= Chilled Water]


Capacity: [08= 8,000 Btuh]

Revision: [A= Wall T'stat] [B= I/R Handheld"]


Aux Heat: [0= No Heat] [1= 1.5 kW] [8= Hydronic Only]

Voltage: A= 115v D= 208-230v F= 220-240v

[A= 2015 New Control]

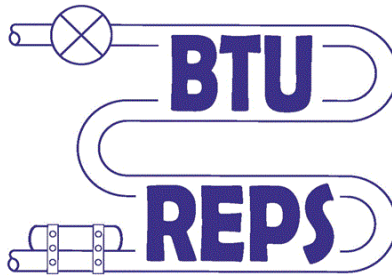

Excellence in Technical Representation
www.btureps.com

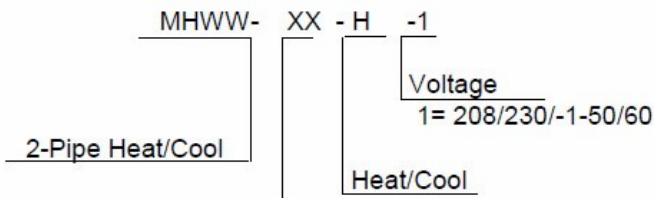

Nominal BTUH

| | | |
|----|---|--------|
| 09 | = | 9,000 |
| 12 | = | 12,000 |
| 18 | = | 18,000 |
| 24 | = | 24,000 |
| 36 | = | 36,000 |

MultiAqua is a 2 Pipe Unit which can be used as a 2 or 4 Pipe with valves. Electric Heat not available.

